


FEELED  
**D bar 2 DUAL**  
 LED for display, cabinet & furniture



**FEELED D bar 2 DUAL (Warm, Cool)**

SIH (Sun In Home) system에 최적화된 D bar2 Dual 은 3,000K~5,700K 까지 색온도 가변이 가능합니다.

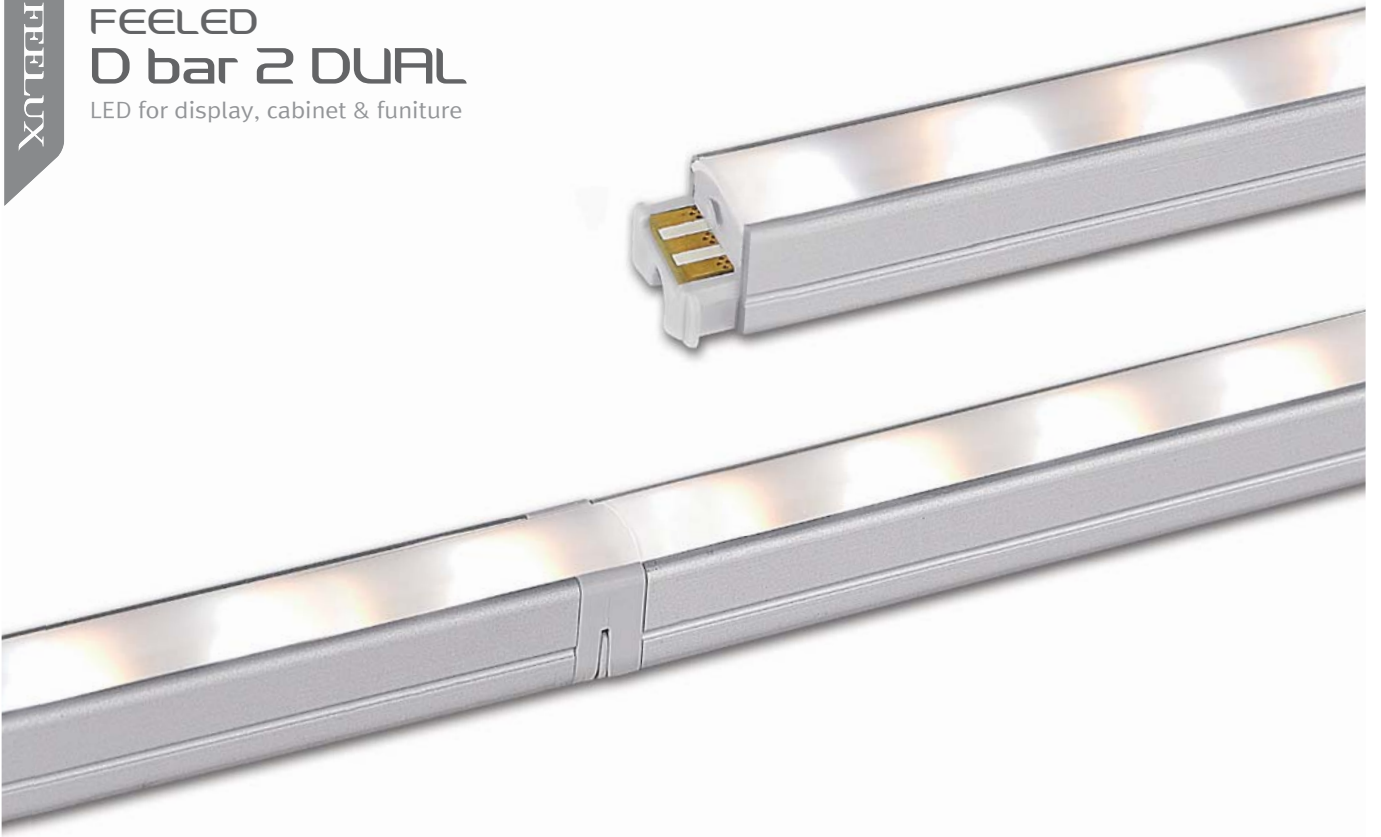


## 연결




## 규격

### 표준제품

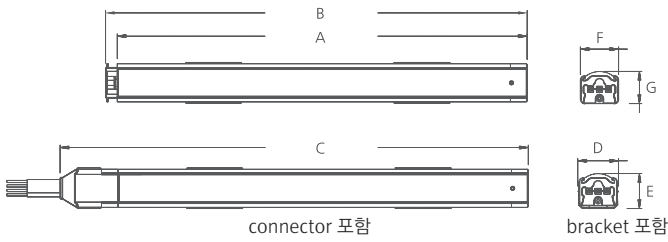


Model Name	입력전압 (V)	소비전력 (W)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
DDB 3AWCB24M/KR	DC 24	3	140	145	162	16	14	15	12.5
DDB 6AWCB24M/KR	DC 24	6	280	285	302	16	14	15	12.5
DDB 12AWCB24M/KR	DC 24	12	560	565	582	16	14	15	12.5
DDB 18AWCB24M/KR	DC 24	18	840	845	862	16	14	15	12.5
DDB 24AWCB24M/KR	DC 24	24	1,118	1,123	1,140	16	14	15	12.5


### Round diffuser (라운드 커버)

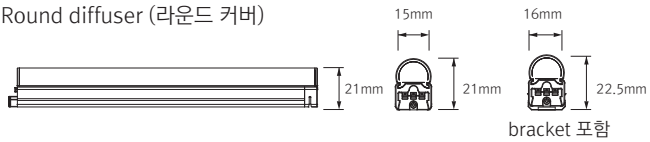


### Square diffuser (사각 커버)

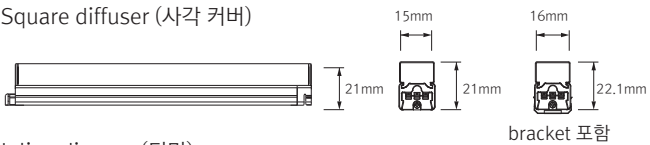

### Inline dimmer (디머)


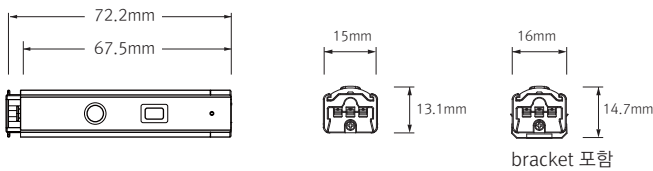


### LED Converter

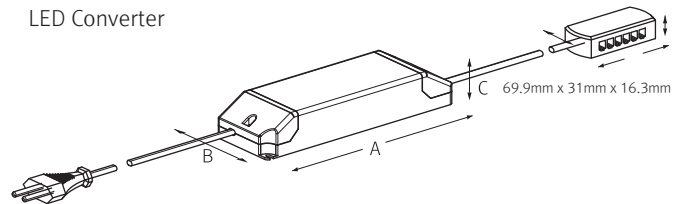

Model name	A (mm)	B (mm)	C (mm)
FLC30-24V/K	150	41	31
FLC75-24V/K	180	60	32

## 직하조도 및 배광곡선

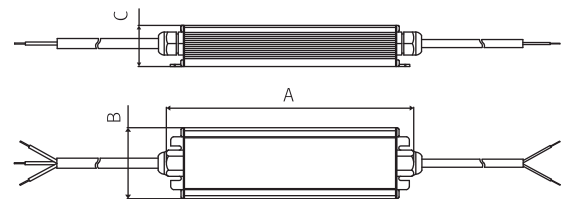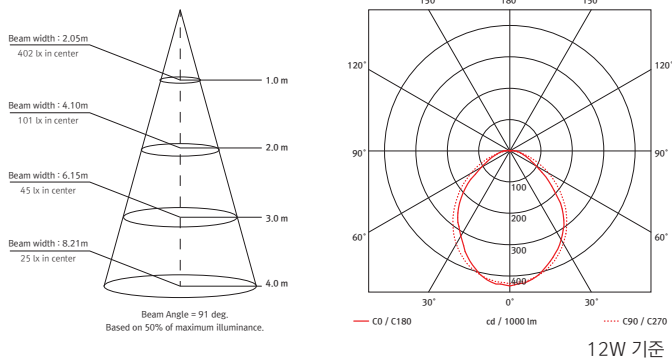

Model name	A (mm)	B (mm)	C (mm)
FLC200-24V/K	229	68	39

## 사양

Model name	입력전압	소비전력	소비전류	광속	광효율	연색성	색온도	무게
DDB 3AWCB24M/KR	DC24V	3W	0.125A	225 lm	75 lm/W	Ra > 85	3,000K ~ 5,700K	45.5g
DDB 6AWCB24M/KR	DC24V	6W	0.25A	450 lm	75 lm/W	Ra > 85	3,000K ~ 5,700K	71.5g
DDB 12AWCB24M/KR	DC24V	12W	0.5A	900 lm	75 lm/W	Ra > 85	3,000K ~ 5,700K	139g
DDB 18AWCB24M/KR	DC24V	18W	0.75A	1,350 lm	75 lm/W	Ra > 85	3,000K ~ 5,700K	208g
DDB 24AWCB24M/KR	DC24V	24W	1.0A	1,800 lm	75 lm/W	Ra > 85	3,000K ~ 5,700K	270g

# FEELED D bar 2 DUAL

LED for display, cabinet & furniture



D bar 2 DUAL 3W 145mm



D bar 2 DUAL 6W 285mm



D bar 2 DUAL 12W 565mm




D bar 2 DUAL 18W 845mm



D bar 2 DUAL 24W 1,123mm



## 특징

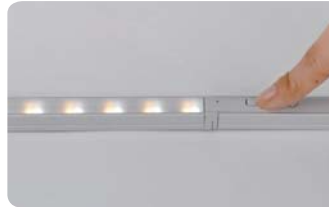

## 약세사리

### ㉔ 연결선

HDBPTC	HDBPTC1	HDBPTC2	HDBPTC4	HDBPTC6
150mm	300mm	600mm	1200mm	1,800mm

### ㉕ 전원선 : HDBPC (2,500mm)

### ㉖ 고정클립 : HDB-BRACKET1 "A"

### ㉗ 각도클립 (15° & 40°) : HDB-BRACKET2 "A"


### ㉘ LED converter

Part No	FLC30-24V/K	FLC75-24V/K
Capacity	30W 24V	75W 24V


### ㉙ LED converter

Part No	FLC200-24V/K
Capacity	200W 24V

### ㉚ Inline dimmer : FSF-L2D/KR



## 설치방법

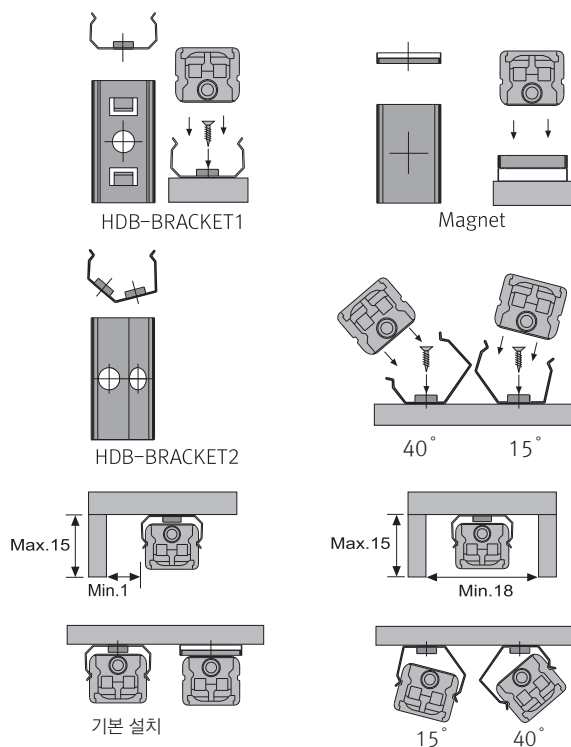

## 주의

최대연결개수 : 직렬 연결시 최대 24W 기준 2개 (48W)  
컨버터 별 최대 연결 개수는 전력의 80%

Model Name	컨버터 별 최대 연결개수		
	24V/30W	24V/75W	24V/200W
DDB 3AB24M/KR	8	20	54
DDB 6AB24M/KR	4	10	27
DDB 12AB24M/KR	2	5	14
DDB 18AB24M/KR	1	4	9
DDB 24AB24M/KR	1	2	7