

FEELUX

# JumpLine

LED for Display, Cabinet, Furniture & Cove

Bridge your light






### Product Features

- Easy bracket mounting system
- Maintains & produces dot free seamless lighting
- Connector-free lighting system
- To be used with constant voltage DC 24V driver
- Dimmable with available accessories

### Specification

- Voltage : DC 24V
- Operating temperature : 0~45° C
- Lamp life : 50,000hrs / 70%
- Available color : 2700K, 3000K, 3500K, 4000K, 5700K
- Color rendering : Ra > 85
- Energy efficiency : 85lm/W
- Degree of protection : IP20

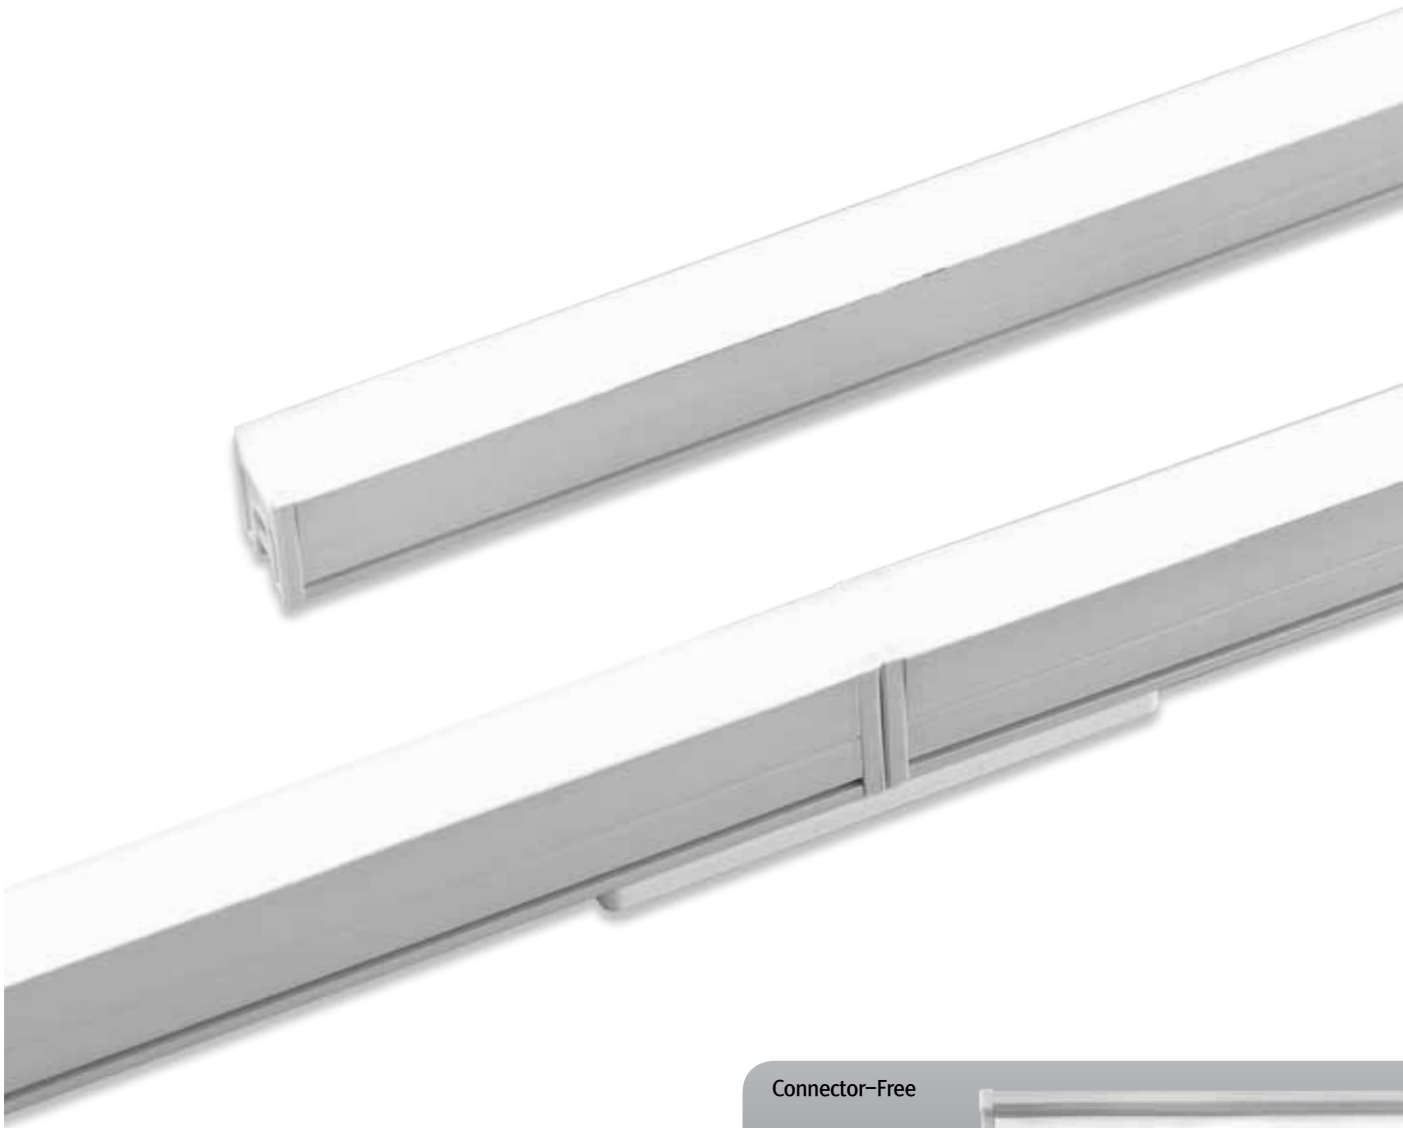

Connector-Free






### Easy connection



### Dimension

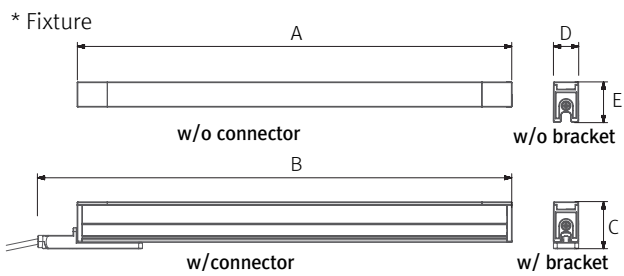

Model Name	Power Input (V)	Lamp Power (W)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
NJP 4W	DC 24	4	284	299.6	18.6	10	16.1

### Max. connection

- JumpLine : 120W in one row(Single powerfeed)

LED Driver / Model Name	Max. units for LED Driver			
	24V/15W	24V/30W	24V/75W	24V/200W
NJP 4W	3	7	18	50

**Accessories**



**(a) Connecting cables (between Jumpline & Jumpline)**

NJPPTC	NJPPTC1	NJPPTC2	NJPPTC4	NJPPTC6
150mm(6inch)	300mm(1feet)	600mm(1feet)	1200mm(4feet)	1800mm(6feet)




**(b) Power cable : NJPPC**

Power cable (Between Jumpline & 6way distributor)



**(c) Direct connector : NJPCPL**

Direct connector (Between Jumpline & Jumpline)



**(g) LED Driver with 6way distributor, with power cord (1800mm)**

Part No	FLC15-24V/T	FLC30-24V/T	FLC75-24V/T
Capacity	15W 24V	30W 24V	75W 24V



**(h) LED Driver : FLC200-24V/T (200W 24V)**

LED Driver With 6way distributor



**(i) Dimming Interface (1-10V) : FDC-L10**

Max. 100W (100W/CH, 1CH)




**(j) Dimming Interface(0-10/1-10,DMX512)**

FDA-L2M0 : Max. 200W (100W/CH, 2CH)  
 FDA-L5M : Max. 200W (100W/CH, 5CH)



**(l) Door and motion detection sensor : FLS-M24V**

Voltage : DC 24V



**(m) Human-body detection sensor : FLS-P24V**

Voltage : DC 24V