

FLX Stix CDV

Ultra Slim Refrigeration lighting

Super slim Freezer and Cooler lighting



- Special Beam Angle for Multiple Uses.
- Super slim Freezer and Cooler lighting
- Special Color Red Led for Meat
- High Efficiency / High Output
- High CRI (CRI 90)
- IP65 Rating
- Comply with EN 60335-2-89





Asymmetric frosted




Specification


Model Name	Voltage Input	Lamp Power	Luminous Flux/4000K	Energy Efficiency	Color Rendering	Available Color	Operating Temperature	IP
CDV4-40K-24V	DC24V	4.2 W	478 lm	115 lm/W	Ra > 90	3000, 4000K	-30~35°C	IP 65
CDV8-40K-24V		8.3 W	969 lm	116 lm/W				
CDV12-40K-24V		12.3 W	1414 lm	115 lm/W				
CDV16-40K-24V		16.4 W	1930 lm	117 lm/W				
CDV20-40K-24V		20.8 W	2432 lm	117 lm/W				
CDV4-MR-24V		4.2 W	243 lm	60 lm/W	-	MEAT RED		
CDV8-MR-24V		8.3 W	488 lm					
CDV12-MR-24V		12.3 W	726 lm					
CDV16-MR-24V		16.4 W	970 lm					
CDV20-MR-24V		20.8 W	1201 lm					

Dimension

Model Name	Power Input	Lamp Power	A(mm)	B(mm)	C(mm)
CDV4-40K(MR)-24V	DC24V	4	300	16.5	17.8
CDV8-40K(MR)-24V	DC24V	8.3	600	16.5	17.8
CDV12-40K(MR)-24V	DC24V	12.3	900	16.5	17.8
CDV16-40K(MR)-24V	DC24V	16.5	1200	16.5	17.8
CDV20-40K(MR)-24V	DC24V	20.6	1500	16.5	17.8

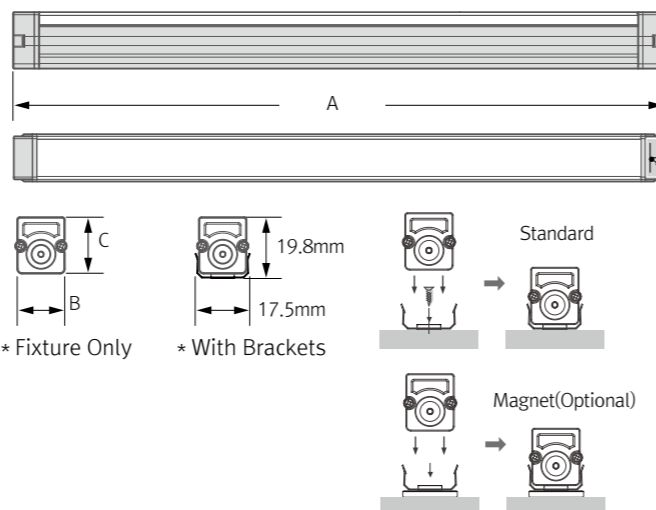

Connection

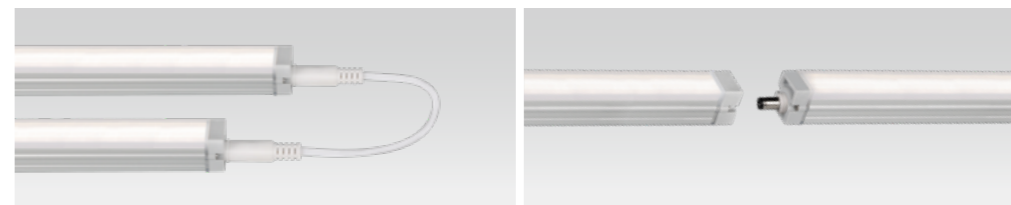

Accessories

① FLX Stix CDV

CDV4-(color)K-24V (4W)	CDV4-MR-24V (4W)
CDV8-(color)K-24V (8W)	CDV8-MR-24V (8W)
CDV12-(color)K-24V (12W)	CDV12-MR-24V (12W)
CDV16-(color)K-24V (16W)	CDV16-MR-24V (16W)
CDV20-(color)K-24V (20W)	CDV20-MR-24V (20W)



② Connecting Cable

CDVPTC 150mm
CDVPTC 300mm
CDVPTC 600mm



③ Direct connector

CDVCPL



④ Power cable

CDVPC 1,800mm



⑤ Open Power cable (Standard type)

CDVOPC 1,800mm




⑥ Open Power cable (Vertical type)

CDVOPC-V 1,800mm



⑦ Mounting Bracket (End cap included)

CDV-BRACKET



⑧ Mounting Magnet Bracket (Optional)

CDV-BRACKET-M



⑨ LED Driver : FLC200-24V/T (200W, DC24V)

IP66



⑩ LED Driver : FLC75-24V/T (75W)

