

DATE	PROJECT	LOCATION	TYPE
------	---------	----------	------



PRODUCT FEATURES

- Easy "Horizontal" Slide Connection System
- Vertical Slide-Up Replacement System
- Slim Design for Long Seamless Runs
- Dali Dimming (Compatible with Dali2)

PRODUCT SPECIFICATIONS

- Voltage : AC 220~240V
- Operating Temperature : 0-40°C
- Power Factor : PF>0.9
- Lamp Life : 40,000hr / 70%
- Available Color : *2200K, 2700K, 3000K, 3500K, 4000K
- CRI > 90
- Max Connection per Single Power Feed(400W)
 - 5W(80pcs), 10W(40pcs), 15W(26pcs), 20W(20pcs)




* 4000K performance data shown. Refer to individual luminaire IES files for other CCTs.


* Pending factory availability

Product	Model Number	Voltage Input	Energy Consumption	Luminous Flux	Luminous Efficacy	Color Rendering Index	Operating Temperature
VSSL(Dali)	VSSL5 40K-230V-DALI-C90	AC 220V~240V	6W	438 lm	73.33 lm/W	CRI > 90	0-40°C
	VSSL10 40K-230V-DALI-C90	AC 220V~240V	9.8W	730.3 lm	74.15 lm/W	CRI > 90	0-40°C
	VSSL15 40K-230V-DALI-C90	AC 220V~240V	14.8W	1,208.3 lm	81.52 lm/W	CRI > 90	0-40°C
	VSSL20 40K-230V-DALI-C90	AC 220V~240V	20.3W	1,697.4 lm	83.51lm/W	CRI > 90	0-40°C


MODEL SELECTION KEY

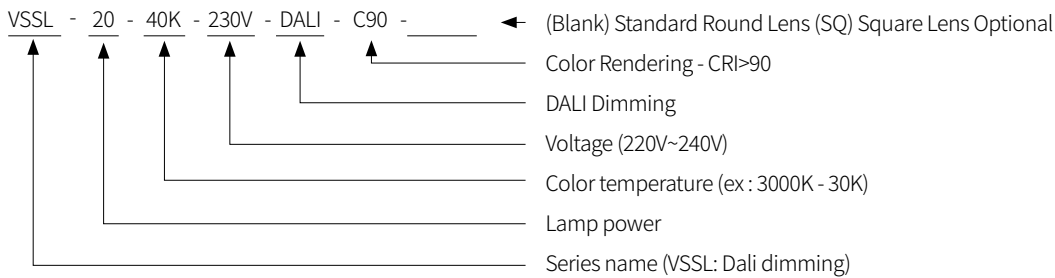

*(Blank) Standard Round Lens

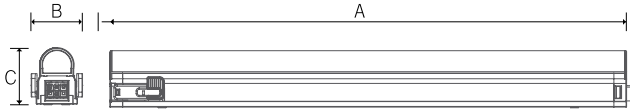


*(SQ) Square Lens Optional




Product	Model Number	Dimension (mm)		
		A	B	C
VSSL(Dali)	VSSL5 40K-230V-DALI-C90	350mm(13.78')	32.3mm(1.27')	35.2mm(1.39')
	VSSL10 40K-230V-DALI-C90	580mm(22.83')	32.3mm(1.27')	35.2mm(1.39')
	VSSL15 40K-230V-DALI-C90	870mm(34.25')	32.3mm(1.27')	35.2mm(1.39')
	VSSL20 40K-230V-DALI-C90	1160mm(45.67')	32.3mm(1.27')	35.2mm(1.39')


DIMENSION




Without BRACKET




With BRACKET

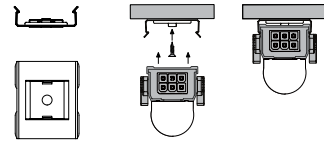


Standard mounting
SSL-BRACKET






Angle Brackets
SSL-BRACKET2



Magnet Brackets
SSL-BRACKET-M

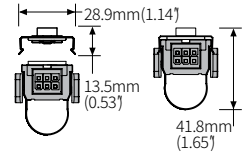


SLIDE CONNECTION SYSTEM

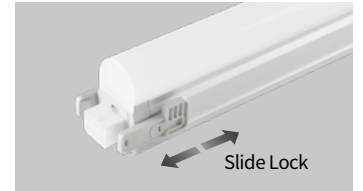


INSTALLATION

- VSSL

Power Connection

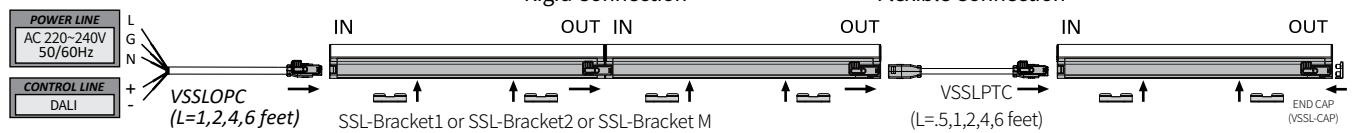


★ Wire Diagram

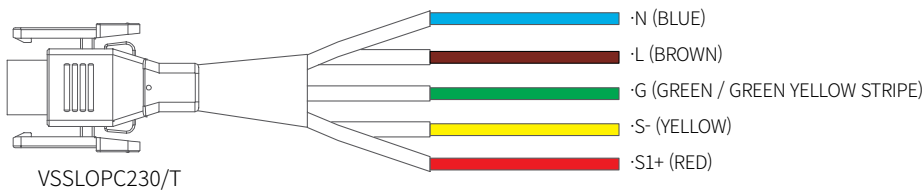


BEAM SPREADS


VSSL5 40K-230V-DALI-C90
73.33 lm/W
438 lm




VSSL10 40K-230V-DALI-C90
74.15 lm/W
730.3 lm



VSSL15 40K-230V-DALI-C90
81.52 lm/W
1,208.3 lm




VSSL20 40K-230V-DALI-C90
83.51 lm/W
1697.4 lm



4000K performance data shown. Refer to individual luminaire IES files for other CCTs.

ACCESSORIES



Connecting Cable

- __VSSLPTC/T (6)
- __VSSLPTC1/T (1)
- __VSSLPTC2/T (2)
- __VSSLPTC4/T (4)
- __VSSLPTC6/T (6)



Open Power Cord

- __VSSLOPC120/T (6)
- __VSSLOPC1/T (1)
- __VSSLOPC2/T (2)
- __VSSLOPC4/T (4)



Mounting Brackets (Included fixture)

- __SSL-BRACKET(B) : 1set = 3pcs



Angle Brackets (Optional)

- __SSL-BRACKET2(B) : 1set = 3pcs



Magnet Brackets (Optional)

- __SSL-BRACKET-M(B) : 1set = 3pcs