

SlimLamp

T5 Linear Illumination



SlimLamp

SlimLamp has a remarkably low profile and comes in five different lengths to make it ideally suitable for any under cabinet installation where an inconspicuous light source is required. Its built-in electronic ballast provides instant-on starting with no flickering, and has a silent operation. It gives off extremely low heat, so it is the perfect lighting for heat-sensitive items. The fixture is easy to install with a snap-in system, capable of combining several fixtures effortlessly.

Easy connection



C-type
Installation
without bracket



Product Features

- Built-in electronic ballast
- Linkable up to 400W together with only one power outlet
- Cool operation ideal for heat-sensitive item display
- Rigid aluminum extruded body and snap-in mounting brackets
- Polycarbonate diffuser that gives a soft glow

Benefits

- Low energy consumption, high light output
- Instant-on starting, no flicker, long lamp life : 20,000hrs,
- Superior strength with aluminum body
- Ballast and lamp shut down if fault present
- Satisfy world class standard, CE & TUV certified and UL listed


Application

- Space for Modern design by using T5 size (16mm)
- Office, Hotel, Living room, Cabinet, Showcase, Furniture

Specification

- Frequency range : 50/60Hz
- Voltage : 220~240V, 110~130V
- Power factor : >97%
- Color rendering : Ra>80
- Tube life: 20,000hr
- Tube diameter: 16mm(T5)
- Class of protection II
- Degree of protection IP20

Installation

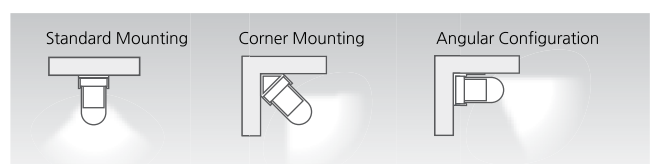



Notice

- Max. connection : 400W
- 8W(50pcs), 14W(28pcs), 21W(19pcs), 28W(14pcs), 35W(11pcs), 24W(16pcs), 39W(10pcs), 54W(7pcs)

Accessories

Ⓐ Connecting cables

| | | | | |
|--------------|--------------|--------------|---------------|---------------|
| DLPTC/T | DLPTC1/T | DLPTC2/T | DLPTC4/T | DLPTC6/T |
| 150mm(6inch) | 300mm(1feet) | 600mm(2feet) | 1200mm(4feet) | 1800mm(6feet) |

Ⓑ Direct connector : DLCPL/T

Ⓒ Power cord

- DLPC230/T
- DLPC230/SM2/T (Straight type)

Ⓓ Diffuser

| | | | | |
|-------|--------|--------|--------|--------|
| SL8CV | SL14CV | SL21CV | SL28CV | SL35CV |
| 8W | 14W | 21W | 28W | 35W |

Ⓔ Mounting Bracket

Ⓕ Fluorescent lamps

- 2200K, 2700K, 3000K, 3500K, 4000K, 6500K, 8000K, Red, Green and Blue are available.

Ⓖ On/Off switch : DLSB/T

| Model Name | LampPower (W) | lm | L (mm) | W (mm) | H (mm) | H (mm) with diffuser |
|--------------|---------------|------|--------|--------|--------|----------------------|
| SL8AB23NN/T | 8 | 430 | 345 | 22.6 | 33 | 35.5 |
| SL14AB23NN/T | 14 | 1200 | 595 | 22.6 | 33 | 35.5 |
| SL21CB23NN/T | 21 | 1900 | 895 | 22.6 | 33 | 35.5 |
| SL28CB23NN/T | 28 | 2600 | 1195 | 22.6 | 33 | 35.5 |
| SL35CB23NN/T | 35 | 3300 | 1495 | 22.6 | 33 | 35.5 |
| SL24AB23NN/T | 24 | 1750 | 595 | 22.6 | 33 | 35.5 |
| SL39CB23NN/T | 39 | 3100 | 895 | 22.6 | 33 | 35.5 |
| SL54CB23NN/T | 54 | 4450 | 1195 | 22.6 | 33 | 35.5 |

