

PRODUCT FEATURES


- Seamless Illumination
- UltraSlim Profile
- Even Illumination of Surface
- Spot Free Lens Options
- Multiple Lengths for Easy Configuration
- End to End Connection
- Bracket or Magnetic Mounting
- Dimmable with Accessories

PRODUCT SPECIFICATIONS

- Voltage: 24VDC Constant Voltage Feelux or Approved Driver
- Operating Temperature: 32-113 °F (0-45 °C)
- Lamp Life: 40,000 hrs / 70%
- Available Color: 2700K, 3000K, 3500K, 4000K, 6000K
- Color Rendering: Ra > 80
- Energy Efficiency: 75 Lm/W - 3.5W/Ft - 262.5 Lm/Ft
- IP20 Damp Location/Closet Approved
- 24V DC Constant Voltage Feelux or Approved Class 2 Driver Required
- Beam Angle: 120 ° / Round Bare Lens - 220 °
- Finish: Natural Aluminum (Standard)
- Warranty: 5 year Warranty
- Certifications



SPECIFICATION DIAGRAM

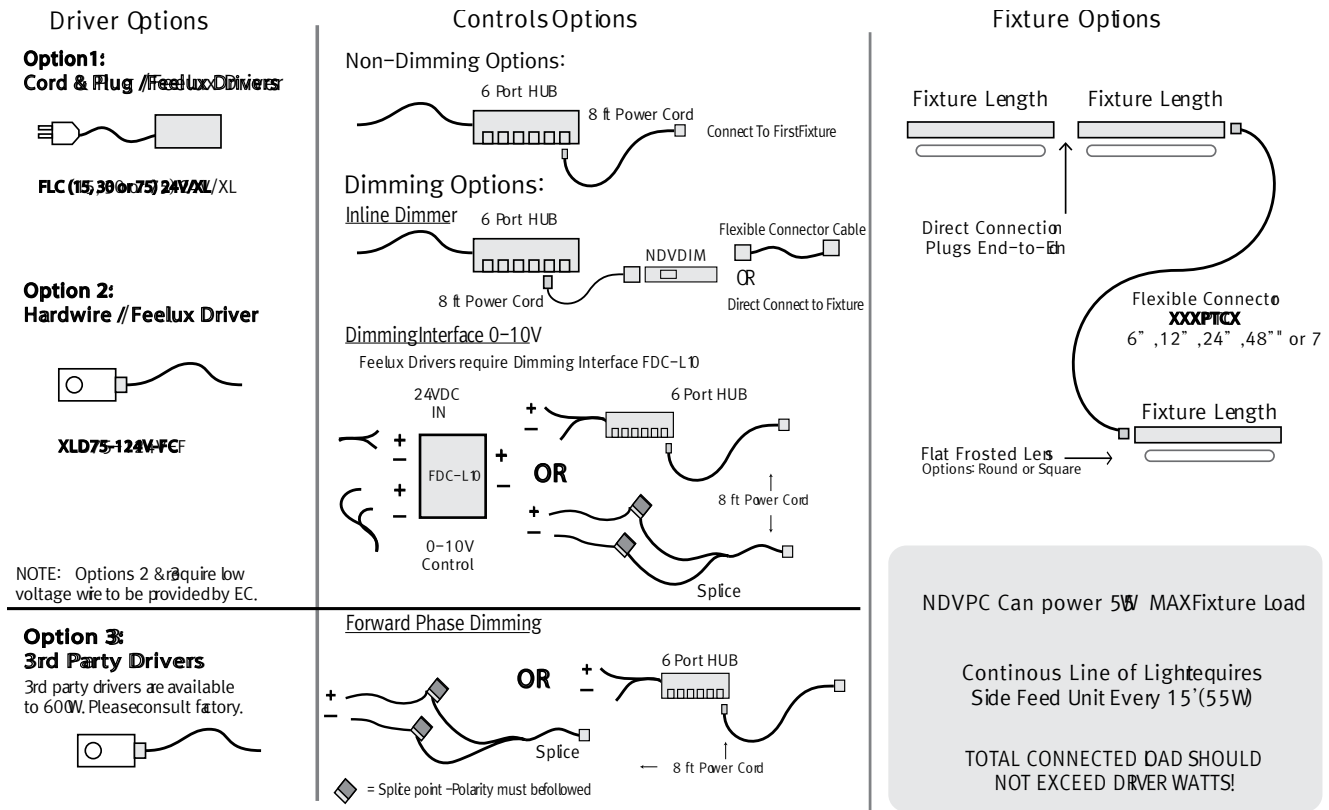


SPECIFICATION GUIDE ALL PARTS NEEDED FOR INSTALLATION WILL BE INCLUDED, FOR ADDITIONAL COMPONENTS ORDER SEPARATELY ON PAGE


MODEL	COLOR	LENS	MOUNTING	CONFIGURATION	RUN LENGTH	DRIVER	CONTROLS	VOLTAGE
NDV	27K - 2700 K 30K - 3000 K 35K - 3500 K 40K - 4000 K 60K - 6000 K	ST - Flat Frosted RM - Round Milky SM - Square Milky	STD - Flat Brackets Magnets Included BK2 - 15 ° / 40 ° Brackets	S - Straight V - Varies*	ft. RUN LENGTH IN FEET Fill out for every run section	CP - Cable/Plug HW - Hard Wire TD - 3rd Party Drivers Consult Factory	NDM Non-Dim IDM Inline Dim FDC 0-10V Interface FPH Forward Phase	100V 120V 230V 277V

\*DRAWINGS & RUN LENGTH REQUIRED


COMPONENTS For additional components enter quantity below




Power Cable (8' )  
 \_\_\_\_\_ NDVPC



Side Feed Fixture  
 \_\_\_\_\_ NDV3- \_\_\_\_\_ K24V-  
 [Color]



Connecting Cable  
 \_\_\_\_\_ NDVPTC (6" )  
 \_\_\_\_\_ NDVPTC1 (1' )  
 \_\_\_\_\_ NDVPTC2 (2' )  
 \_\_\_\_\_ NDVPTC4 (4' )  
 \_\_\_\_\_ NDVPTC6 (6' )



Flexible Connector (1W)  
 \_\_\_\_\_ NDV1- \_\_\_\_\_ K-24V-FLEX  
 [Color]



In-Line Dimmer  
 \_\_\_\_\_ NDVDIM



Dimming Interface  
 100W 0/1-10V Signal  
 \_\_\_\_\_ FDC-L10




6 Port Hub  
 \_\_\_\_\_ D6P-HJB  
 Included with Cord & Plug drivers  
 Order separately for HardWire or 3rd P Drivers

CORD & PLUG DRIVERS (100V to 230V)


\_\_\_\_\_ FLC15-24V/XL \_\_\_\_\_ FLC30-24V/XL \_\_\_\_\_ FLC75-24V/XL



Consult Factory for 3rd Party Drivers




Square Diffuser  
 \_\_\_\_\_ NDV-1WSM (4" )  
 \_\_\_\_\_ NDV-3WSM (7.6" )  
 \_\_\_\_\_ NDV-4WSM (1' )  
 \_\_\_\_\_ NDV-7WSM (2' )  
 \_\_\_\_\_ NDV-11WSM (3' )  
 \_\_\_\_\_ NDV-15WSM (4' )



Round Diffuser  
 \_\_\_\_\_ NDV-1W-RM (4" )  
 \_\_\_\_\_ NDV-3W-RM (7.6" )  
 \_\_\_\_\_ NDV-4W-RM (1' )  
 \_\_\_\_\_ NDV-7W-RM (2' )  
 \_\_\_\_\_ NDV-11W-RM (3' )  
 \_\_\_\_\_ NDV-15W-RM (4' )




End Cap  
 \_\_\_\_\_ NDV-CAP  
 Included with fixture



Metal Mounting Brackets  
 \_\_\_\_\_ NDV-BRACKET1  
 Included with fixture



Metal Mounting Brackets  
 Angled -15°/40° (BK2)  
 \_\_\_\_\_ NDV-BRACKET2  
 NOT ncluded with fixture



Connecting Brackets  
 Fixture to Fixture  
 \_\_\_\_\_ NDV-BRACKET3  
 Included with fixture



Connecting Brackets  
 Power Feed to Fixture  
 \_\_\_\_\_ NDV-BRACKET4  
 Included with NDVPC & all NDVPTC

HARDWIREDRIVER (90V to 300V)


\_\_\_\_\_ XLD75-124V-FC



(NDV)

NDV DIMENSIONS	NDV15 44"	NDV11 33 1/16"	NDV7 22 1/16"	NDV4 11"	NDV3 7 3/8"	NDV1 3 3/8"
----------------	--------------	-------------------	------------------	-------------	----------------	----------------

INSTALLATION DIAGRAM SHOWN HERE FOR DIMENSION PURPOSES ONLY. REFER TO PAGE 1 FOR SPECIFICATION GUIDE

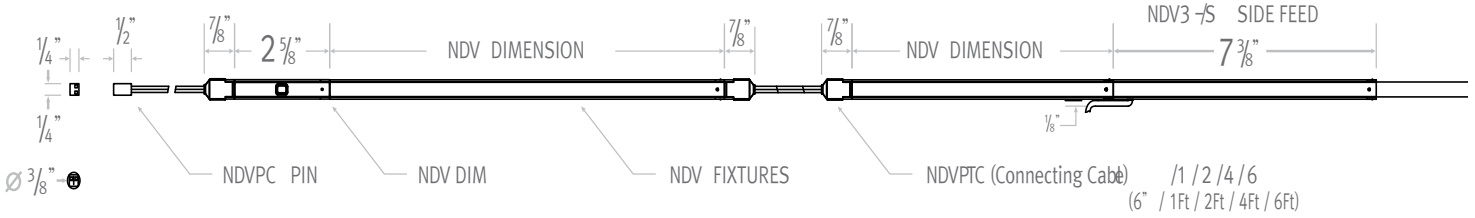

**FIXTURE AND ACCESSORY DIMENSIONS**

NDV1 (ColorK)-24V LED 1W length (100 mm) Nominal 3 3/8"

NDV3 (ColorK)-24V LED 3W length (192 mm) Nominal 7 3/8"


NDV4 (ColorK)-24V LED 4W length (285 mm) Nominal 11"

NDV7 (ColorK)-24V LED 7W length (565 mm) Nominal 22 1/16"


NDV11 (ColorK)-24V LED 11W length (845 mm) Nominal 33 1/16"

NDV15 (ColorK)-24V LED 15W length (1123 mm) Nominal 44"

**DIMMING OPTIONS**

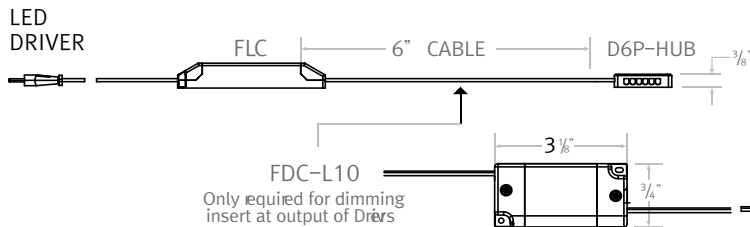


**FLEXIBLE CONNECTOR**

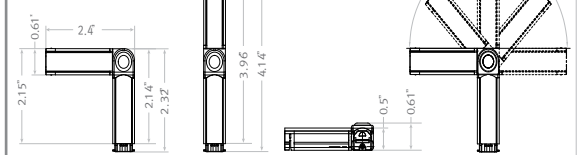


**DRIVER OPTIONS**

**FLC PLUG-IN DRIVER SIZES**

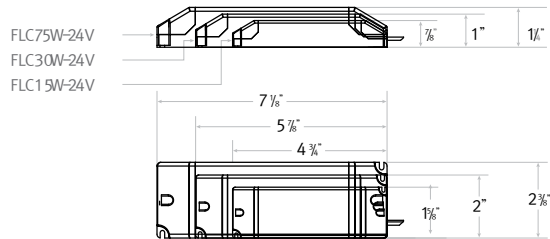

**HARDWIRE 75W LED DRIVER**

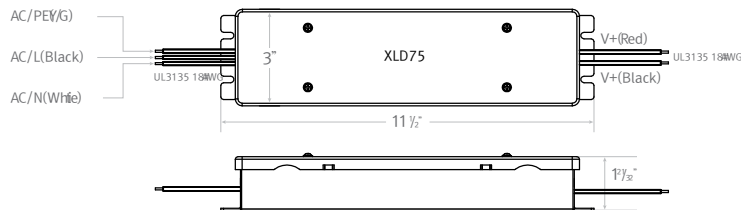

NDV PROFILE DIMENSIONS +	NDV-B<math>\text{C}</math>T1	NDV-B<math>\text{C}</math>T2 40 Degees	NDV-B<math>\text{C}</math>T2 15 Degees
<b>SECTION DIMENSIONS</b>			
<b>ROUND DIFFUSER</b>			
<b>SQUARE DIFFUSER</b>			